

Time Varying Delay Systems

Divya Singh¹, Neha Singh²

Mtech Scholor Dept. of ET&T, Asst. Prof. Dept of ET&T

ABSTRACT

The development of the hardware systems has incurred various types of delays such as processing and transmission delays. Such delay may be due to the effect of tolerances of electronic components which were used while developing the system. Such time delay parameters must be implemented in the transfer function of the system so as to identify the correct cause of dynamic behavior of the system which in turn affects the stability of the system. For the development of the accurate system it is required to consider the condition for the global robust asymptotic stability. Criteria for verifying robust stability are formulated as feasibility problems over a set of frequency dependent linear matrix inequalities. The criteria can be equivalently formulated as Semi-Definite Programs (SDP) using Kalman-Yakubovich-Popov lemma. Therefore, checking robust stability can be performed in a computationally efficient fashion. The Lyapunov-Krasovskii approach is definitely the most popular method to address this issue and many results have proposed new functionals and enhanced techniques for deriving less conservative stability conditions. The paper surveys the techniques used for developing the stable system from the various literatures published recently and draws the result that which method is best to develop a reliable and stable systems.

Keywords- *Semi-Definite Programs (SDP), Stability, Time Varying System, Integral Quadratic Constraint*

I. INTRODUCTION

It is well-known that the manifestation of time delays in a system can lead to performance degradation and even destabilization of the system. For systems in which the signal transmission time delays among sensors, compensators and actuators are small, compared to the time constant of the overall system, the effect of time delay is often not significant enough to cause serious problems. This is not the case, however, within the context of large-scale distributed and networked systems, where the effects of time delays can be very significant. Time delay system is a subclass of infinite dimensional systems that has been frequently employed since it can model commonly arising transport and propagation phenomena. For such systems, time-delay robustness must be explicitly addressed to ensure that system-level performance is achieved in a robust manner. Time-delay robustness is often studied for situations in which the delay is uncertain but remains constant throughout time. Delays can be encountered in many processes such as biology, chemistry, economics, and population dynamics [2] as well as in networks [3]. However, delays are the origin of performance and stability degradation, which thus have motivated a lot of work. While much research has been done and stability criteria have been derived for systems with uncertain constant time-delays, the recent emphasis has been put on the scenario where the time delay is time varying. The significance of such problems is tied to the recent ample interest in designing control algorithms for large-scale networked systems. For applications within the scope of large-scale distributed and networked systems, such as the regulation of internet traffic and control over networked

communication channels. Other engineering applications where time-varying delays appear include real-time implementation of control systems and control of fuel injection systems. The results obtained while the research work by authors have been extended to time varying delay systems either using adapted Lyapunov-Krasovskii [9, 10, 11, 12, 13, 14, 15, 16, 17] or robustness tools [18, 19, 20]. These latter methodologies often require, explicitly or implicitly, the delay-free system to be stable, which is a rather important restriction. Time-varying delay systems are expressed in terms of Linear Matrix Inequalities (LMIs) which may be solved efficiently with Semi-Definite Programming (SDP).

II. RELATED WORK

This section presents the related work previously produced by the researchers. Basically the methodologies for achieving the stability and controllability have been discussed below.

Jin-Hoon Kim presented the stability of linear systems with a time-varying delay using Lyapunov Krasovskii functional (LKF) approach. The authors main contribution to this paper is to present a result expressed in the form of LMI which overcomes the upper bound

$$\max_{\mu \rightarrow 0} h \leq 4.4721$$

using a new simple LKF. The basic ideas in constructing a new LKF are adoption of the cross terms of variables and quadratic terms multiplied by a higher degree scalar function. In recent works (Park & Ko, 2007; Shao, 2009; Zhu & Yang, 2010), the property of first order convex combination property was used. Similarly, in this paper, the property of quadratic convex function, namely Lemma 1, is used. Also, Lemma 2 gives an upper bound of the integral of quadratic function multiplied by a 1st/2nd degree scalar function. The author concluded that by considered the stability of time-delayed linear systems with a time-varying delay in the case of simple LKF approach without delay decomposition, the allowable maximum size of delay had a fixed bound for years. To overcome this, the author constructed a new simple LKF which has the cross terms of variables and quadratic terms multiplied by a higher degree scalar function. And then, using the property of a quadratic convex function and an upper bound of the integral of quadratic multiplied by a scalar function, author derived a delay-dependent stability criterion in the form of LMIs. Finally, by two well-known examples, author presented the usefulness of the result.

Yassine Ariba et al. presented an original approach: the quadratic separation. For this the author exploited the delay operator properties to provide delay range stability conditions. In particular, L2-norm of delay-dependent operators is computed so as to reduce the conservatism of the approach.

Moreover, the main result is able to assess the stability of non-small delay systems, i.e., it can detect a stability interval for systems that are unstable without any delay. The quadratic separation provides a fruitful framework to address stability of non-linear and uncertain systems [21, 22]. Recent studies [8] have shown that such a framework reduces significantly the conservatism of the stability analysis of time-delay systems with constant delay. In this paper authors extend this method to time varying delay systems, which involves the development of results for a new set of operators. This result includes two conditions: a matrix inequality related to the lower block of the feedback system and an inner product that states an integral quadratic constraint (IQC) on the upper block. The author concluded that using an augmented state, which emphasizes the relation between h and $(x, x$

), the resulting criteria have been expressed in terms of a convex optimization problem with LMI constraints. Finally, numerical examples showed that this method reduced conservatism and improve the maximal allowable interval on the delay.

E. Fridman et al. says that in the researched work cited,

descriptor model transformation has been introduced. The authors compare methods under different transformations and show the advantages of the descriptor one. Authors also obtained new delay-dependent stability conditions for systems with time varying delays in terms of linear matrix inequalities. Authors also refine results on delay-dependent

control and extend them to the case of time-varying

H_∞ delays. Numerical examples illustrated the effectiveness of the method. Previously two main approaches for dealing with the stability of systems with time-varying delays was available. The first is based on Lyapunov

Krasovskii functionals and the second is based on Razumikhin theory. The authors considered two main cases of time-varying delays:

1. differentiable uniformly bounded delays with delay-derivatives bounded by $d < 1$; and
2. continuous uniformly bounded delays.

Author says to the best of their knowledge, the Razumikhin approach was the only one that was able to cope with the second case, which allows fast time-varying delays. In his paper the author shed more light on the conservatism of the various model transformations and shows the advantages of the descriptor one. Authors revealed the sources for the conservatism of delay-dependent stability methods and the advantages of the one under descriptor transformation have been demonstrated. The maximum values of h that still allow stability via state-feedback are depicted in figure 1 as a function of d .

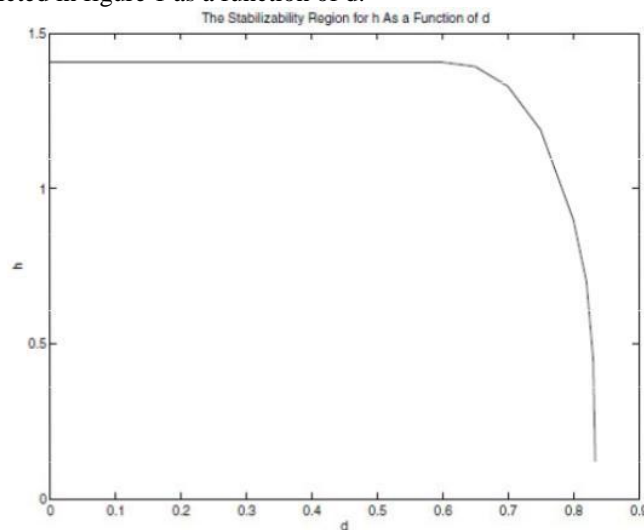


Fig.1: The stabilizability bounds for the time-delay h as a function of d .

In figure 2 authors describe the minimum achievable value of γ as a function of d for $h=1.38$ and for $\varepsilon_1 = -0.29$ and $\varepsilon_2 = -1$. The latter value of h is quite close to the maximum achievable value of $h = 1.408$.

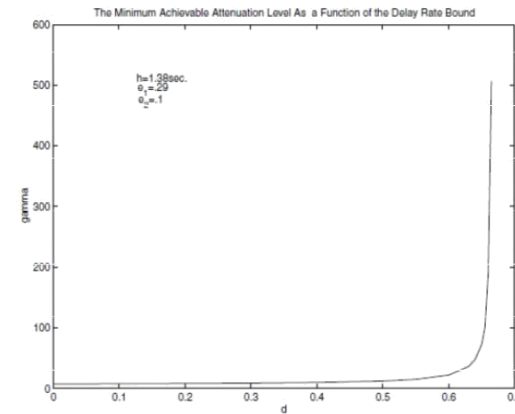


Fig.2: The minimum achievable attenuation level as a function of d for h =1:38.

Two types of results for systems with time-varying delays have been derived: delay-dependent/rate-dependent and delay-dependent/rate-independent. In both cases, the new stability results are less restrictive than the existing results (Kim 2001), obtained for the first (less robust) case. The authors results for the second case, which includes fast-varying delays, seem to be less conservative than those of Fridman and Shaked.

III. RESULT

The system presented above is simulated in Matlab 2014a version and the outputs are obtained. The values of h_1 and h_2 have been changed the test of stability has been performed as shown below:

Table.1: Admissible upper bound h_2 for various h_1 , for the system.

S. No.	h_1	h_2
1.	1	21
2.	3	23
3.	5	25
4.	7	27
5.	9	29
6.	11	31

When the delay is constant and $h_1 = h_2 = 1$ and $h_1 = h_2 = 5$, an eigenvalue analysis shows that the maximal acceptable constant sampling period $T_m = T_M = T$ for which the system remains asymptotically stable is $T = 0.76$ and T

$= 0.21$, respectively. It has been also noted that the summation inequality is not conservative when $h_1 = h_2 = 1$. Hence, the conservatism in this case comes from the approximation the uncertain system.

IV. CONCLUSION

In this technical note the summation inequality presented is relevant for the stability analysis of discrete time systems with interval time-varying delays.

V. ACKNOWLEDGEMENT

Working on stability criteria of the system needs high amount of information and knowledge. I hereby like to thank all the authors whose paper directly or indirectly helped me to understand the stability and control of the system.

VI. REFERENCES

- [1] Y. Ariba, F. Gouaisbaut, and K. H. Johansson. Stability interval for time-varying delay systems. In the 49th IEEE Conference on Decision and Control (CDC 10), Atlanta, USA, December 2010.
- [2] V. B. Kolmanovskii and A. Myshkis. Introduction to the Theory and Applications of Functional Differential Equations. Kluwer Academic Publishers, 1999.
- [3] L.G. Bushnell. Networks and control. IEEE Control Systems Magazine, 21, February 2001.
- [4] R. Sipahi, S. Niculescu, C.T. Abdallah, W. Michiels, and Keqin Gu. Stability and stabilization of systems with time delay. Control Systems Magazine, IEEE, 31(1):38 65, feb. 2011.
- [5] K. Gu, V. L. Kharitonov, and J. Chen. Stability of Time-Delay Systems. Birkh"auser Boston, 2003. Control engineering.
- [6] E. Fridman and U. Shaked. An improved stabilization method for linear time-delay systems. IEEE Trans. on Automat. Control, 47:1931 1937, November 2002.
- [7] A. Seuret. Lyapunov-Krasovskii functional parameterized with polynomials. In the 6th IFAC Symposium on Robust Control Design, Haifa, Israel, June 2009.
- [8] F. Gouaisbaut and D. Peaucelle. Robust stability of time-delay systems with interval delays. In 46th IEEE Conference on Decision and Control, New Orleans, USA, December 2007.
- [9] Y. He, Q. G. Wang, L. Xie, and C. Lin. Further improvement of free-weighting matrices technique for systems with time-varying delay. IEEE Trans. on Automat. Control, 52:293 299, February 2007.
- [10] D. Yue, Q.-L. Han, and J. Lam. Robust H1 Control and Filtering of Networked Control Systems, pages 121 151. Springer London, 2008.
- [11] E. Fridman and U. Shaked. Input-output approach to stability and l2-gain analysis of systems with time-varying delays. Systems & Control Letters, 55:1041 1053, September 2006.
- [12] C. Briat. Robust Control and Observation of LPV Time-Delay Systems. PhD thesis, INP-Grenoble, 2008.



- [13] H. Shao and Q.-L. Han. Less conservative delaydependent stability criteria for linear systems with interval time-varying delays. *International Journal of Systems Science*, pages 1-9, 2011.
- [14] J. Sun, G.P. Liu, J. Chen, and D. Rees. Improved delay-range-dependent stability criteria for linear systems with time-varying delays. *Automatica*, 46(2):466-470, 2010.
- [15] Yeong-jeu Sun. Stability criterion for a class of descriptor systems with discrete and distributed time delays. *Asian Journal Of Control*, 33:986993, 2007.
- [16] Y. Ariba and F. Gouaisbaut. An augmented model for robust stability analysis of time-varying delay systems. *Int. J. Control*, 82:1616-1626, September 2009.
- [17] Z. Du, Q. Zhang, and L. Liu. New delaydependent robust stability of discrete singular systems with time-varying delay. *Asian Journal Of Control*, 13:136-147, 2011.
- [18] C. Y. Kao and A. Rantzer. Robust stability analysis of linear systems with time-varying delays. In *16th IFAC World Congress*, Prague, Czech Republic, 2005.
- [19] Y. Ariba, F. Gouaisbaut, and D. Peaucelle. Stability analysis of time-varying delay systems in quadratic separation framework. In *The International conference on mathematical problems in engineering, aerospace and sciences (ICNPAA 08)*, June 2008.
- [20] C.-Y. Kao and A. Rantzer. Stability analysis of systems with uncertain time-varying delays. *Automatica*, 43(6):959-970, 2007.
- [21] D. Peaucelle, D. Arzelier, D. Henrion, and F. Gouaisbaut. Quadratic separation for feedback connection of an uncertain matrix and an implicit linear transformation. *Automatica*, 43(5):795-804, 2007.
- [22] T. Iwasaki and S. Hara. Well-posedness of feedback systems: insights into exact robustness analysis and approximate computations. *IEEE Trans. on Automat. Control*, 43:619-630, May 1998.
- [23] J. Sun, G.P. Liu, J. Chen, and D. Rees. Improved delay-range-dependent stability criteria for linear systems with time-varying delays. *Automatica*, 46(2):466-470, 2010.
- [24] M.G. Safonov. *Stability and Robustness of Multivariable Feedback Systems*. Signal Processing, Optimization, and Control. MIT Press, 1980.
- [25] M. Wu, Y. He, J. H. She, and G. P. Liu. Delaydependent criteria for robust stability of time varying delay systems. *Automatica*, 40:1435-1439, 2004.
- [26] J. Zhang, C. R. Knopse, and P. Tsiotras. Stability of time-delay systems: Equivalence between Lyapunov and scaled small-gain conditions. *IEEE Trans. on Automat. Control*, 46(3):482-486, March 2001.
- [27] P.-A. Bliman. Lyapunov equation for the stability of linear delay systems of retarded and neutral type. *IEEE Trans. on Automat. Control*, 47:327-335, February 2002.
- [28] Y. Ebihara, D. Peaucelle, D. Arzelier, and T. Hagiwara. Robust performance analysis of linear time-invariant uncertain systems by taking higher-order time-derivatives of the states.